



3252N Two-Way Screen Channel Cinema Loudspeaker System

Professional Series

Application:

Cost effective movie sound track sound reproduction for basic cinema and small-to-mid sized auditoriums

Key Features:

- ▶ Two-way screen channel design for maximum output, optimal coverage, and minimum distortion.
- ▶ Fully passive operation.
- ▶ New molded Optimized Aperture Waveguide technology for ultra low distortion, consistent coverage pattern and extremely uniform frequency response
- ▶ Low Frequency section features dual 15" transducers with aluminum ribbon wire voice coils for low distortion and high efficiency.
- ▶ Newly designed passive network with driver protection circuit
- ▶ All in one enclosure for simple installation
- ▶ Shallow profile and side connector design for minimum behind screen depth requirement
- ▶ Teonex diaphragm high frequency driver for warm and clean sound. Magnetic fluid for low distortion, high power output.

Today's cinemas require perfect coverage in every seat of the auditorium, wide dynamic range and extended bandwidth, as well as inaudible levels of distortion. Digital soundtracks, especially those tracks associated with the new digital cinema requirements, require sound systems for premier auditoriums that can accurately reproduce the sound exactly as recorded.

The 3252N Screen Channel provides smooth and accurate reproduction of cinema soundtracks in a compact and very cost effective system. The convenient all-in-one enclosure requires no field assembly, simplifies set-up to construct a neat sound reproduction system.

A asymmetry horn provides smooth, even coverage throughout the auditorium, without tilting the speaker. The newly-designed passive crossover network is optimized to provide a seamless transition between driver components, for clear, articulate dialog, and high fidelity music reproduction. A protection circuit ensures that all components operate within their optimal power handling range, to ensure many years of high reliability performance.



Specifications:

System:

Frequency Range (-10 dB):	37 Hz-20 kHz
Frequency Response (±3 dB):	53 Hz-18 kHz
System Sensitivity:	103 dB, 2.83V @ 1 m (3.3 ft)
Nominal Impedance:	4 ohms
Rated Maximum SPL:	124 dB, @ 1 m (3.3 ft) 130 dB peak
Input Power Rating ¹ :	400 W
Nominal Coverage:	100° horizontal, -30°, +20° vertical
Crossover frequency:	2000 Hz

Transducer:

Low Frequency Transducer:	Two 380 mm (15 in) dia., 63 mm (2.5 in) ribbon voice coil transducers
High Frequency Transducer:	One 2414H-C compression driver

Physical:


Dimensions (H x W x D):	1100 mm x 640mm x 450mm (43 1/3 in x 25 1/5 in x 17 3/4 in)
Net Weight:	46 kg (101 lbs)
Shipping Weight:	52 kg (115 lbs)

¹ Rating based on test signal of IEC filtered pink noise with a peak-to-average ratio of 6 dB, 100 hours duration.


JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.

▶ 3252N Two-Way Screen Channel Cinema Loudspeaker System


Frequency Response in full-space with external EQ

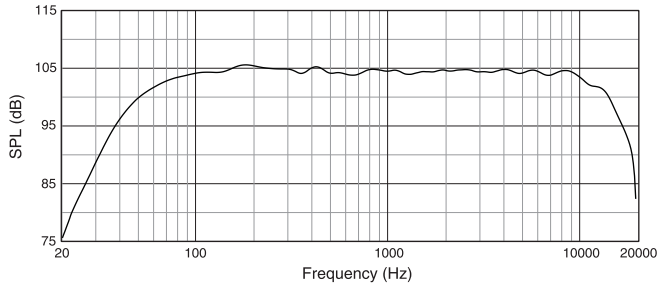

Beamwidth vs. Frequency

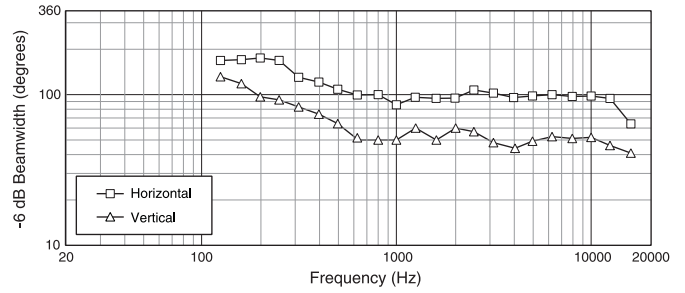


Directivity Index and Factor

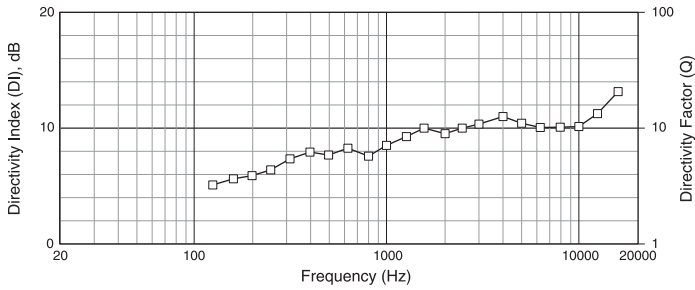

Dimensions

Dimensions in mm (in)

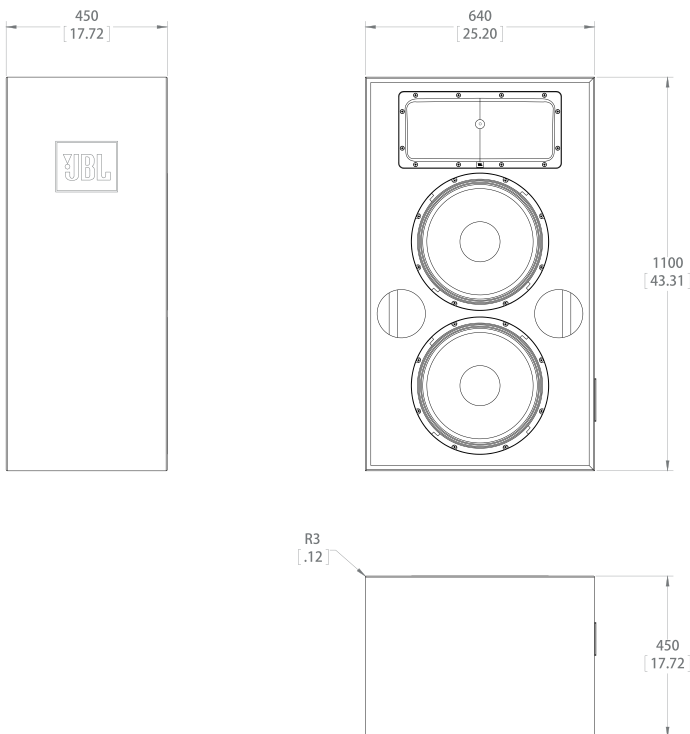

JBL Professional
 8500 Balboa Boulevard, P.O. Box 2200
 Northridge, California 91329 U.S.A.

© Copyright 2012 JBL Professional
www.jblpro.com

SS 3252/3252N
 SZ
 01/13